

Owner's Manual

D9007E

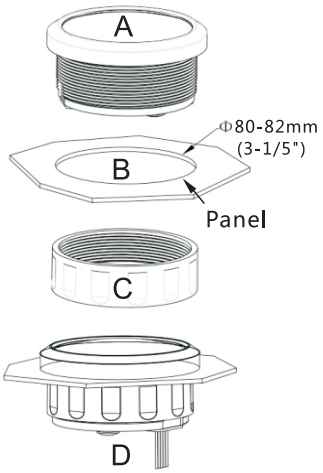


Picture B: Before installation, firstly, to open a hole Φ80-82mm(3-1/5") of the panel ,make sure there is a space with(55mm backyard of panel) as well.

Picture D: Put the gauge in the hole and screw down.

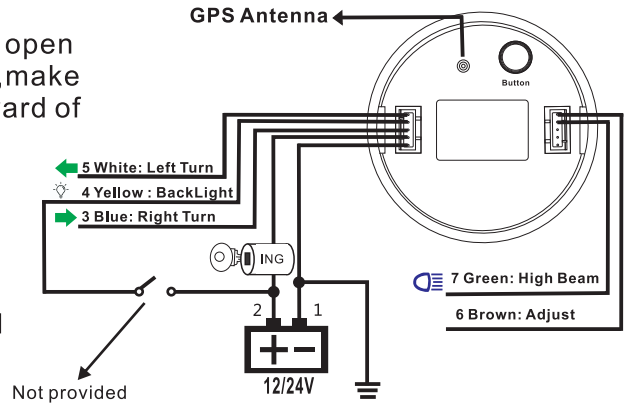

F Wiring diagram




Picture E:Size and annctations

Connection
1 Black: Ground(-)
2 Red: 9-32VDC
3 Blue:Right Turn
4Yellow:Backlight
5 White: Left Turn
6 Brown: Adjust backlight
7 Green: High Beam

GPS installation instructions



Installed in front




Best General Cann't receive GPS signals

GPS installed in reverse



This surface mateiral required plastic or can not shield GPS signal material.



Reverse the GPS antenna installation



Default trip is for single accumulative,will not be clear even the power off

Accumulated mileage, not cleared when power off

Technical parameters:
Operatingvoltage: 9~32VDC
Operating current: ≤100mA
Operating temperature: -30~ 80℃
Storage temperature: -40~ 85℃

1. Turn it on, then the meter star to search the signal and LCD will display ″COG″ , if there is still no GPS signal after three minute, LCD displays ″Err″.

2. Short press the button to change the backlight color : Backlight changed in sequence: red (default) → green → blue → white → yellow → cyan →Purple → (automatic). Automatic: Automatically switch the backlight color every 1 minute, Cycle switch according to the above sequence.

3. Keep on pressing the rubber button of the backside for 5 seconds, Single mileage can be cleared.